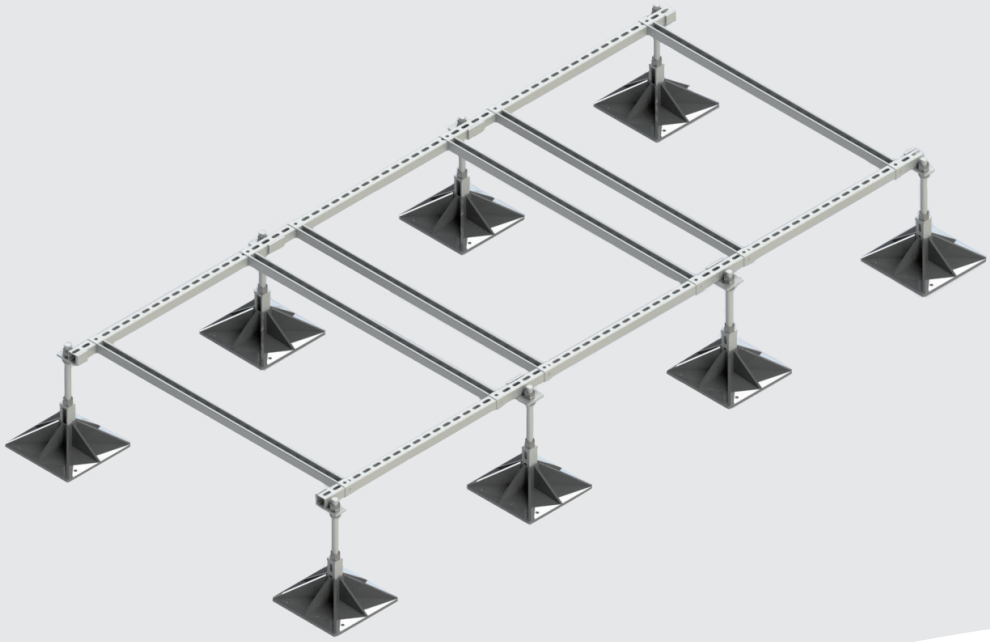

Gewässer
Umwelt
Schutz
GmbH

GUS

GUS*Foot* installation system

- **GUS***Foot* base and plus system
- **GUS***Foot* customised solution

Made in Germany

GUS Foot installation system - Made in Germany

For 15 years, GUS Gewässer-Umwelt-Schutz GmbH has been offering you comprehensive solutions with safety collection systems in the cooling and air conditioning technology segment to meet legal requirements.

Our qualified field service is, if needed, for you in Germany, Belgium, the Netherlands, Luxembourg, the Czech Republic, Denmark, Poland, Austria, Switzerland and other European countries.

High quality at fair prices

If you don't want to compromise on quality but also want to keep an eye on costs, GUS is exactly right for you. At our site in Nordhorn skilled workers produce suitable systems for customer-specific applications. An ongoing development, also in the area of accessories, as well as a continuous reflection within the team on the results guarantees precision work in every detail and an optimal price-performance ratio.

The following pages provide an overview of our GUS Foot installation systems.

You have an idea of your own and questions about feasibility?

Give us a challenge. We look forward to meeting you.
We would be delighted to discuss the best possible solution in a personal conversation directly on site.

Your GUS team

Subject to change without notice. We accept no liability for printing errors. Last updated: June 2019

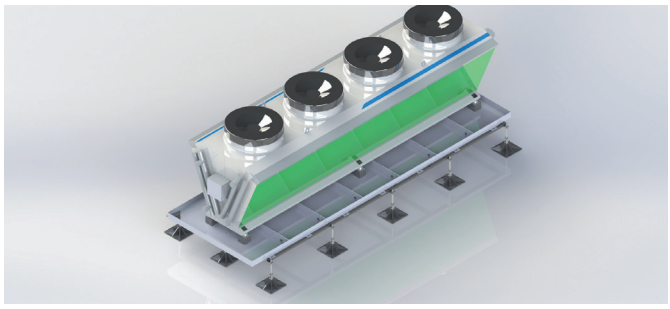

Content

3 GUS Foot installation system - Made in Germany

4 GUS Foot installation system base und plus

6 GUS Foot customised solution

GUS Foot installation system - Made in Germany

GUS Foot installation systems enable quick, versatile and economical solutions for installing technical building equipment systems.

Our GUS Foot systems will astound you with their functionality and robust design, having been developed to make installation by your fitters easier and quicker. By using GUS Foot installation systems, whether the base model or a custom-made item, they offer you the chance to be able to effectively and flexibly plan and carry out your projects without roofers or steel constructors.

For each request you automatically receive a wind load calculation with the production drawing

GUS Foot Systems offer a high level of flexibility and adaptability so that they can be very well adapted to local conditions. On flat roofs, the installation systems can be mounted without damaging the roofs due to their special feet.

Alongside products for installing technical building equipment systems, we also offer installation GUS Foot systems for cable runs, ventilation ducts, pipelines and high-quality vibration dampers made of SBR recycled rubber in different sizes.

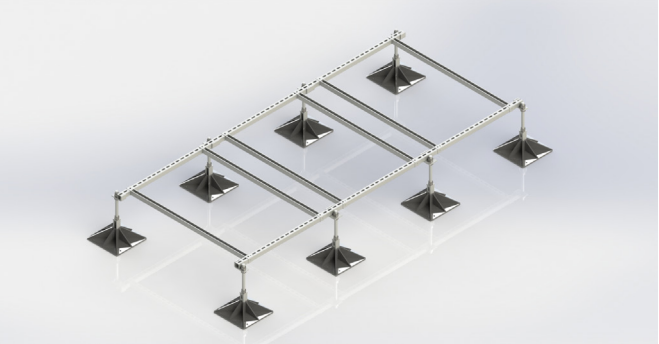

Advantages:

- Quick, simple and safe solution for installing cooling, air-conditioning and ventilation systems
- Robust and safe
- Manufactured entirely in Germany
- Cost and time-effective assembly
- Versatile modular frame construction
- Customized configuration available
- Indicating the wind zone and roof height values
- Minimizes the injury of roof cladding
- Enables flexible project planning

Item GUS Foot	Complete mounting leg group	Bracket Set	Longitudinal strut length mm	Longitudinal cross length mm	Total length max. with feet mm	Module weight kg	Load max. kg
base	4	2	1.000	1.200	1.645	32	800
base + 1plus	6	4	2.000	1.200	1.645	54	1.600
base + 2plus	8	6	3.000	1.200	1.645	78	2.400
base + 3plus	10	8	4.000	1.200	1.645	101	3.200
base + 4plus	12	10	5.000	1.200	1.645	124	4.000
base + 5plus	14	12	6.000	1.200	1.645	148	4.800
...	Optionally customisable						

Customised solution designs based on customer.

GUS Foot Base

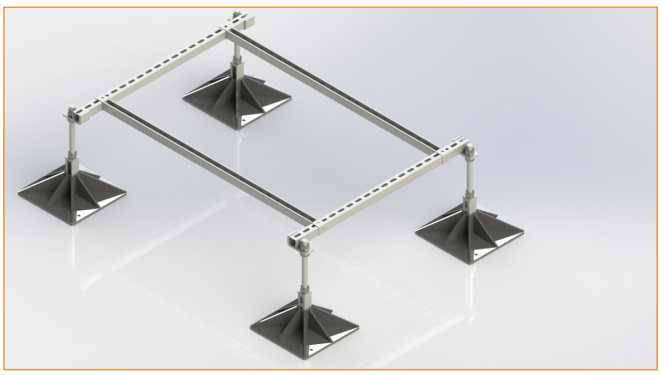

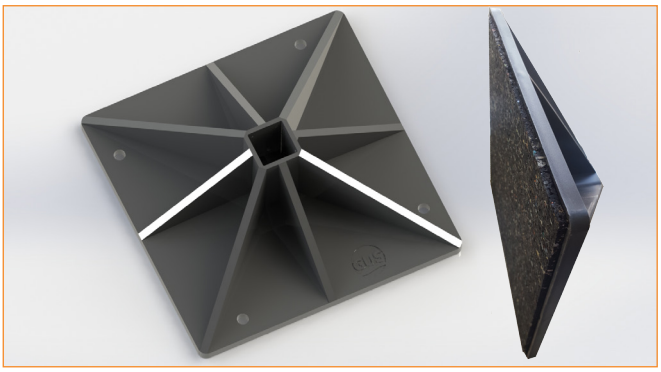

Feet with anti-vibration pads

GUS Foot Plus

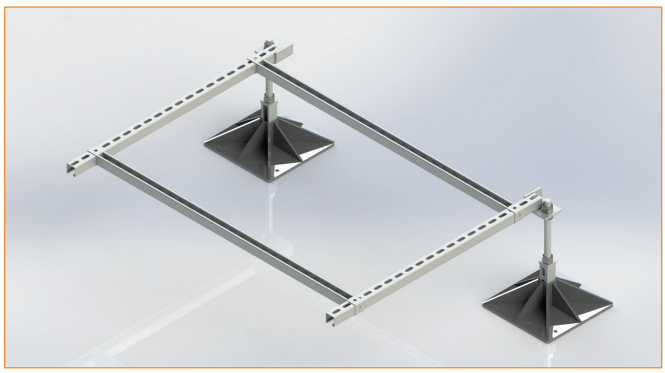

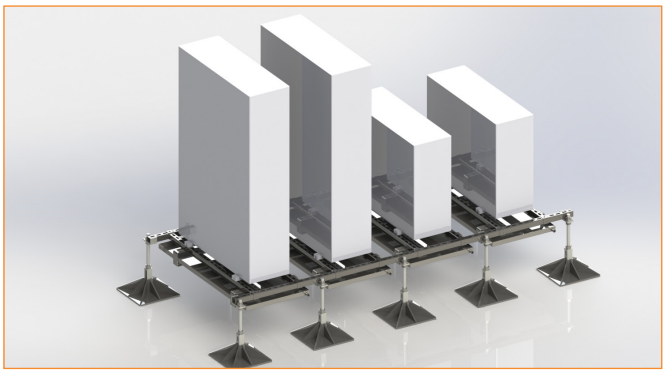

A customised solution with CUW standard

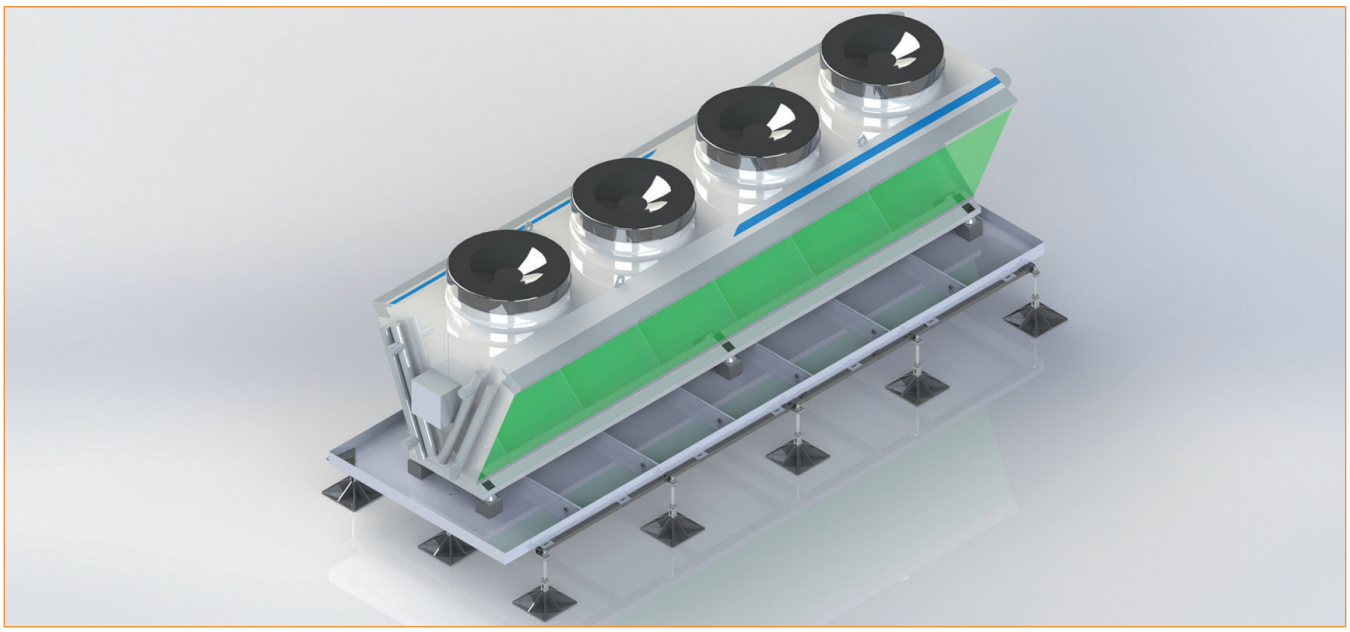

GUS Foot customised solution for chillers with custom-built CUW oil protectors

GUS Foot installation system base

- 2 x 1 m longitudal struts 40 x 40 mm
- 2 x 1,2 m cross struts 40 x 40 mm incl. screw
- 4 x complete legs 320 mm incl. screw, damping mat and threaded bar
- 4 x connecting brackets incl. screw

Module-weight: 32 kg
Max. load: approx. 800 kg

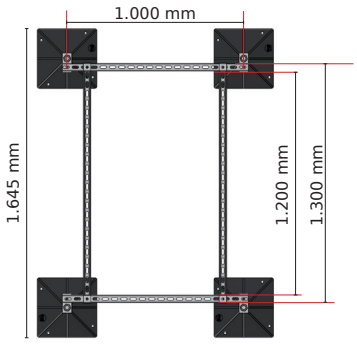

GUS Foot installation system base + 1plus

- 4 x 1 m longitudal struts 40 x 40 mm
- 4 x 1,2 m cross struts 40 x 40 mm incl. screw
- 2 connectors for longitudal struts
- 6 x complete legs 320 mm incl. screw, damping mat and threaded bar
- 6 x connecting brackets incl. screw

Module-weight: 54 kg
Max. load: approx. 1.600 kg

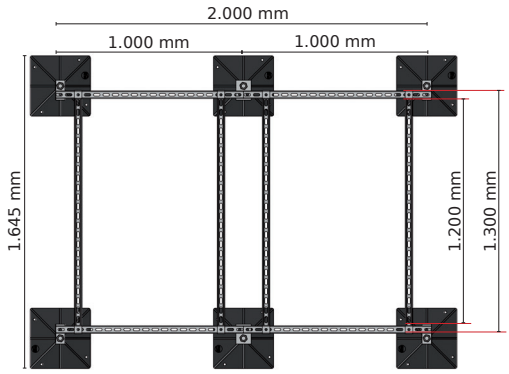

GUS Foot installation system base + 2plus

- 6 x 1 m longitudal struts 40 x 40 mm
- 6 x 1,2 m cross struts 40 x 40 mm
- 4 x connectors for longitudal struts
- 8 x complete legs 320 mm incl. screw, damping mat and threaded bar
- 8 connecting brackets incl. screw

Module-weight: 78 kg
Max. load: approx. 2.400 kg

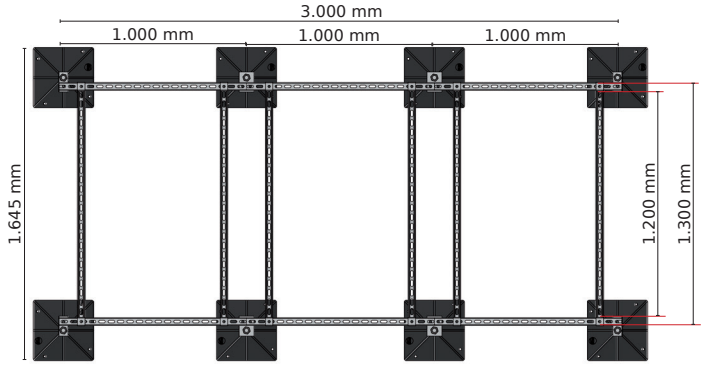

GUS Foot installation system...

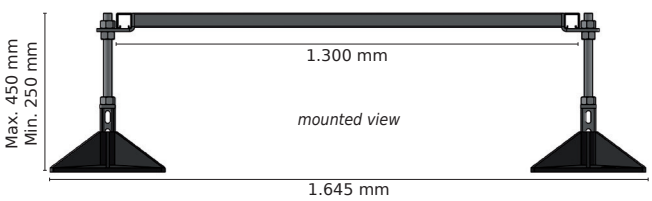

Customised solution:

We are happy to realise your projects with custom sizes, so please contact us.

GUS Foot Installation system ...

...customisable

Technical information

Technical information	GUS Foot installation system
Material	Body: S235 JR galvanised; Base: PP black + damping mat
Manufacture	Welding according to DIN EN ISO 9606-1

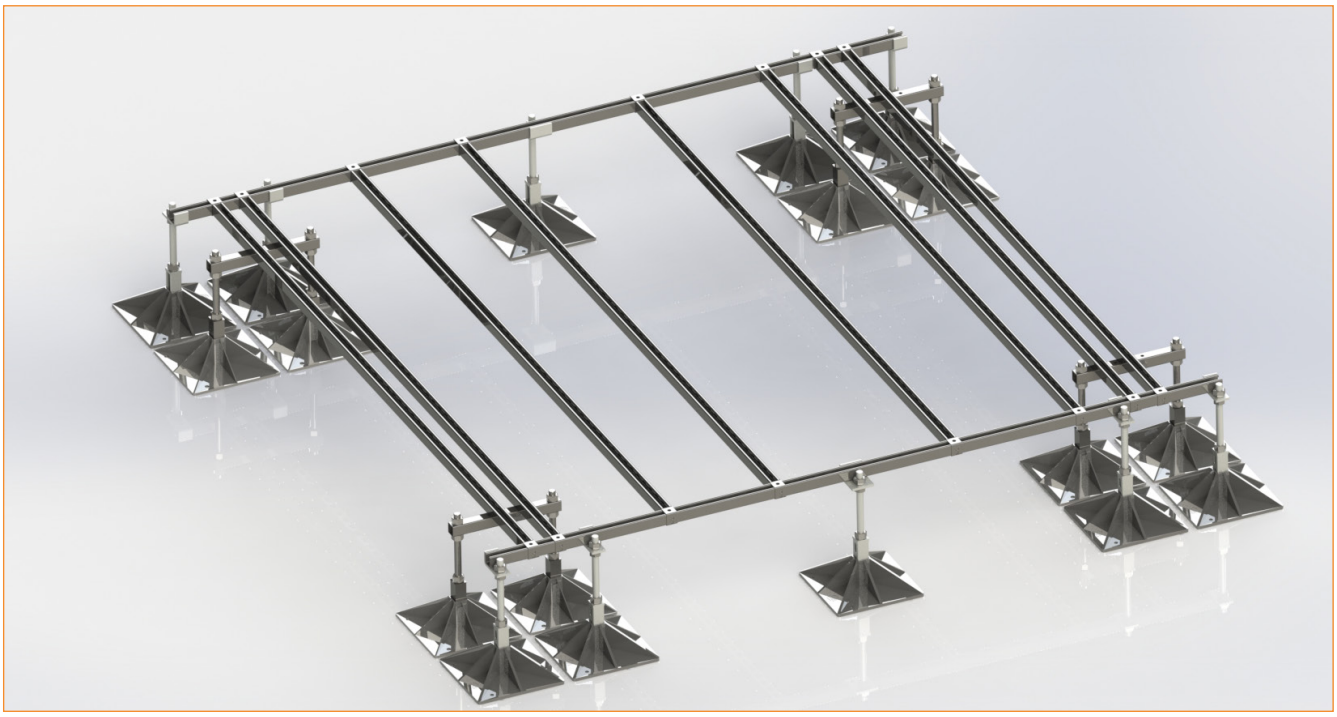

GUS Foot customised solution for chillers

GUS Foot customised solution with additional support for the crossbars

GDS vibration dampers

Item	Height mm	Width mm	Length mm	Max. load per foot kg
GDS 400	95	180	400	240
GDS 600	95	180	600	450
GDS 1000	95	180	1.000	645

Applications:

The GDS vibration dampers from the standard series are a practical and versatile installation solution for outdoor devices, pipe lines and ventilation ducts.

The vibration dampers have a 41 x 22 mm aluminum profile strip upon which devices, leads and ducts can be fastened with the help of the supplied screw sets.

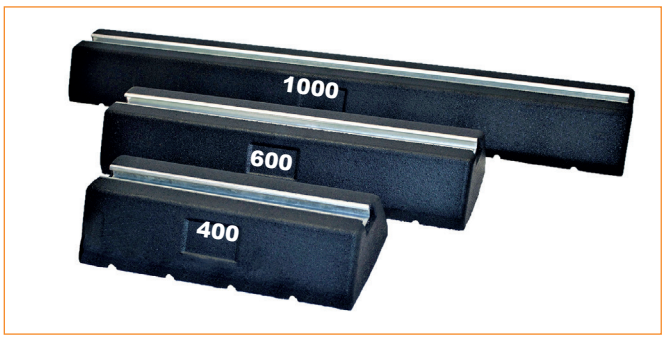

GDS vibration dampers

GTT 320 line career

for pipes and cables

- Contents:
  - 2 feet 320 x 320 mm
  - 2 fastening brackets incl. screw connection
- Optimum and economical solution for fastening pipes and lines
- Simple and quick installation anti-vibration pads on the feet
- The C profile is not included in the set, suitable for
- Standard C profiles 40 x 40 mm

GAB 800 installation block

Installation system for submounting heavy devices

- Load capacity: 800 kg
- Flexibly adjustable
- Anti-vibration pads on the feet
- Feet in 4th set 320 x 320 mm
- Simple and quick assembly

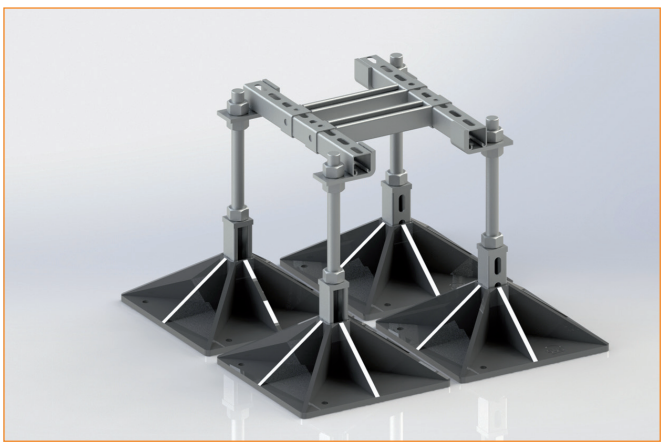

Gewässer
Umwelt
Schutz
GmbH

Lise-Meitner-Straße 14
D-48529 Nordhorn

T: +49 (0) 5921 71347-0

info@oelprotektor.de

Ölprotektor.de